




Carbide Drill for Reamer Standard Specifications

HALCYON TECHNOLOGY PLC.

41 Moo 14 Bangchan Industrial Estate Soi 6, Serithai Road, Minburi, Bangkok, Thailand 10510

Tel: +66 2 906 3242-49 e-mail: sales@halcyon.co.th

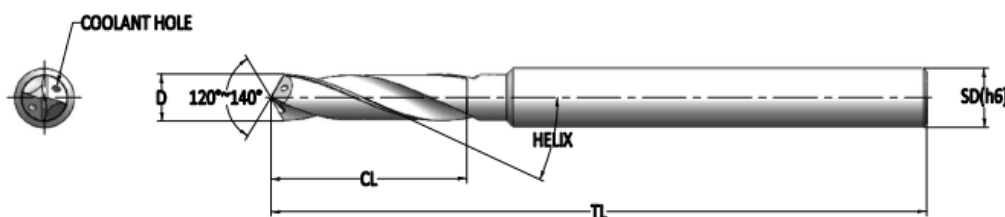


For Press Fit & Slip Fit

Item Code	Diameter [± 0.01]	Cutting Length	Total Length	Shank Dia. [h6]	No. of Flutes (Z)	No. of Coolant Holes	Helix Angle
	D (mm)	CL (mm)	TL (mm)	SD (mm)			
CDR-027172-30	2.7	17	70	3	2	-	30°
CDR-037192-30	3.7	19	70	4	2	-	30°
CDR-037192-30-C						2	30°
CDR-047252-30	4.7	25	80	5	2	-	30°
CDR-047252-30-C						2	30°
CDR-056322-30	5.6	32	80	6	2	-	30°
CDR-056322-30-C						2	30°
CDR-076402-30	7.6	40	100	8	2	-	30°
CDR-076402-30-C						2	30°
CDR-095482-30	9.5	48	100	10	2	-	30°
CDR-095482-30-C						2	30°
CDR-115582-30	11.5	58	115	12	2	-	30°
CDR-115582-30-C						2	30°
CDR-135662-30	13.5	66	115	14	2	-	30°
CDR-135662-30-C						2	30°
CDR-154742-30	15.4	74	125	16	2	-	30°
CDR-154742-30-C						2	30°
CDR-174842-30	17.4	84	125	18	2	-	30°
CDR-174842-30-C						2	30°
CDR-194922-30	19.4	92	150	20	2	-	30°
CDR-1949202-30-C						2	30°
CDR-2131002-30	21.3	100	150	22	2	-	30°
CDR-2131002-30-C						2	30°
CDR-2431152-30	24.3	115	170	25	2	-	30°
CDR-2431152-30-C						2	30°

Remarks:

- Price: ex factory
- Any special upon request available

Updated: October 2023

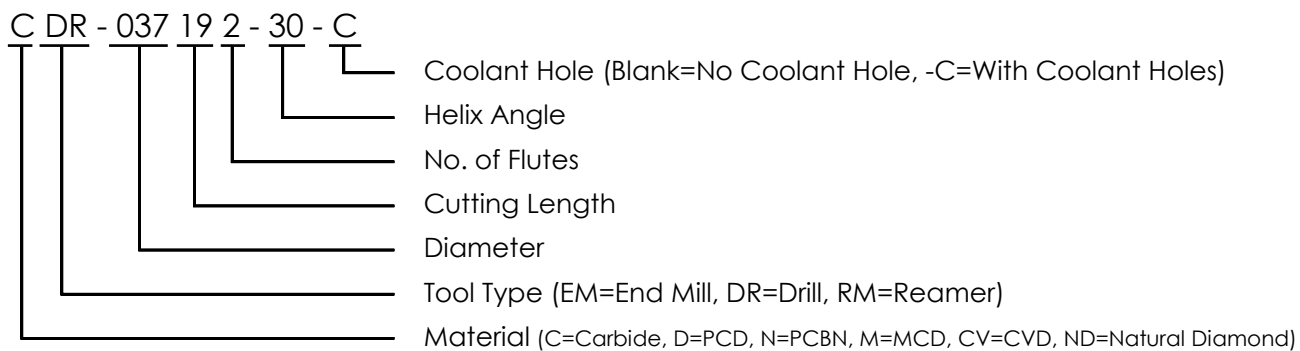How to read item code:

Remarks:

- Price: ex factory
- Any special upon request available